



TYPE A - PARALLEL

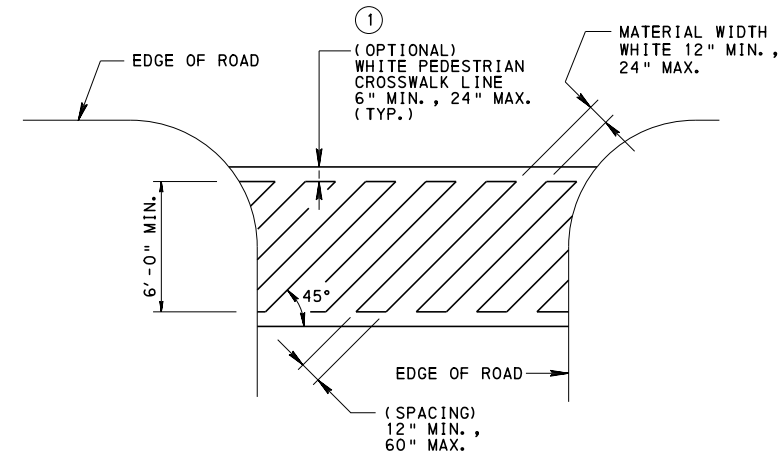


TYPE B - DIAGONAL

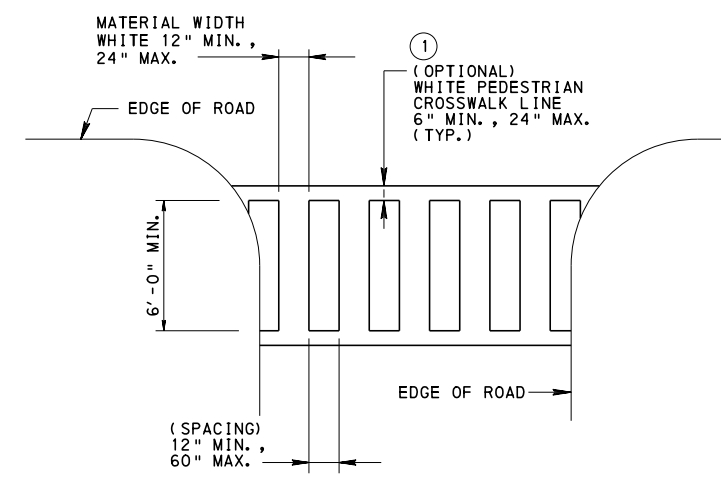


TYPE C - PERPENDICULAR

STANDARD CROSSWALK MARKINGS


DECORATIVE CROSSWALK

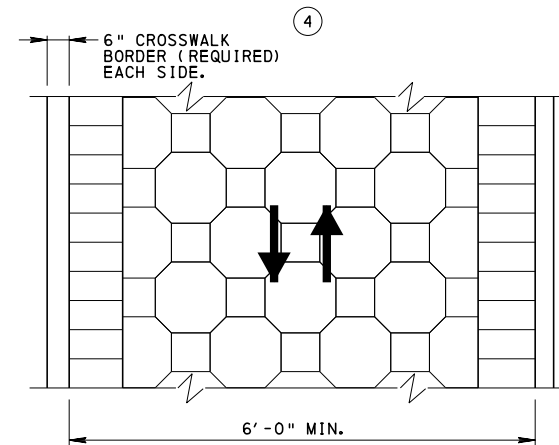

TYPE D - COURTYARD

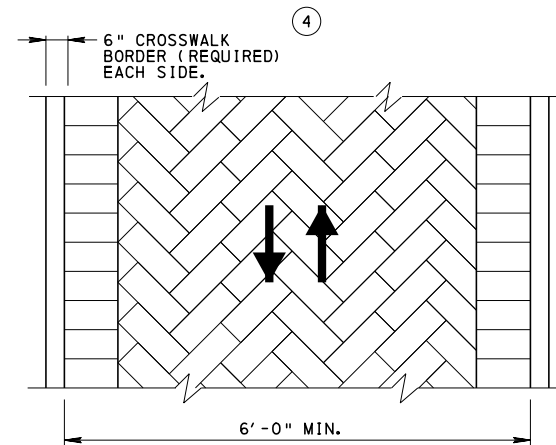

TYPE E - HERRINGBONE

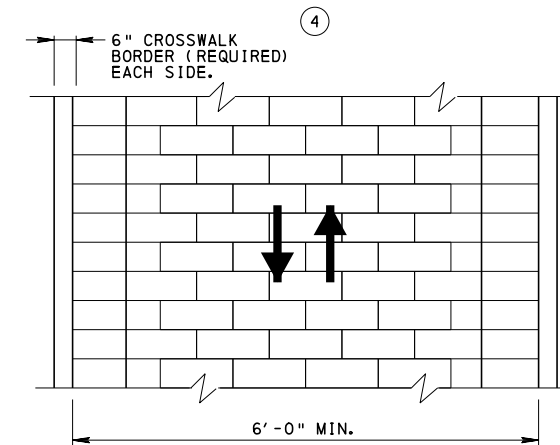



TYPE F - OFFSET BRICK

APPROVED NON-REFLECTIVE COLORS: WHITE, BLACK, BROWN, SILVER-GRAY, TAN AND MAROON

NOTES:

1. MAKE THE CROSSWALK LINES SOLID WHITE, NOT LESS THAN 6" WIDE.
2. EXTEND THE CROSSWALK ACROSS THE ROADWAY FROM FACE OF CURB TO FACE OF CURB OR EDGE OF SHOULDER AS APPLICABLE.
3. THE MINIMUM WIDTH OF CROSSWALKS SHALL BE 6'.
4. A WHITE BORDER, 6" WIDE, IS REQUIRED ALONG EACH SIDE OF THE DECORATIVE CROSSWALK, THE BORDERS ARE TO BE PARALLEL USING A PENNDOT APPROVED PAVEMENT MARKING MATERIAL AND EXTENDS FROM FACE OF CURB TO FACE OF CURB OR SHOULDER.

LEGEND

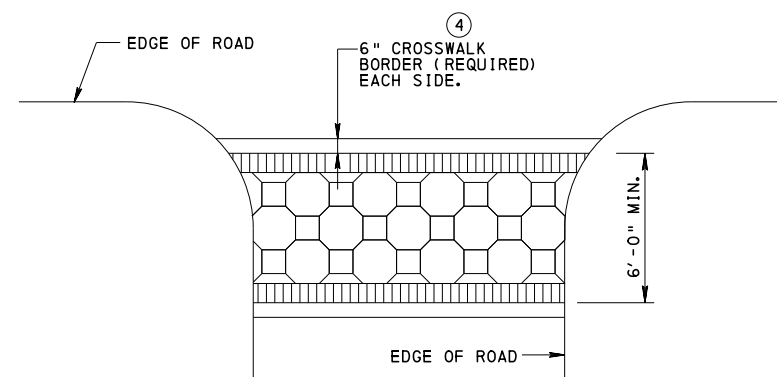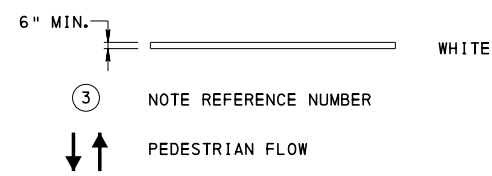

PLAN - CROSSWALK WITH DECORATIVE PATTERN

SEE DECORATIVE CROSSWALK PATTERNS.
(DECORATIVE CROSSWALK PATTERN MUST BE
CONTAINED WITHIN THE 6" WHITE PEDESTRIAN
CROSSWALK BORDERS FORMING THE CROSSWALK)

COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF TRANSPORTATION
BUREAU OF MAINTENANCE AND OPERATIONS

PAVEMENT MARKINGS

CROSSWALKS

RECOMMENDED JUN. 13, 2013
Stephen C. Rowe
CHIEF, TRAFFIC ENGINEERING AND
PERMITS SECTION

RECOMMENDED JUN. 13, 2013
Stephen J. Thumme
CHIEF, HIGHWAY SAFETY AND
TRAFFIC OPERATIONS DIVISION

SHT. 6 OF 13

TC-8600